


# ZephIR™ 2.5e

## INFRARED CAMERA




Introducing the groundbreaking ZephIR 2.5e, the first camera to feature a T2SL sensor up to 2500 nm. With its state-of-the-art thermo-electric cooling, the ZephIR 2.5e delivers unparalleled operability and ultra-low noise performance. Engineered for speed and equipped with versatile connectivity options, it's the ideal solution for both industrial precision and scientific exploration. Step into the future of infrared imaging and redefine what is possible with the ZephIR 2.5e.

### TECHNICAL SPECIFICATIONS

|                                       |  |     |      |
|---------------------------------------|--|-----|------|
| Sensor                                | T2SL FPA   |     |      |
| Sensor Format                         | 640 x 512  |     |      |
| Pixel size                            | 15 µm  |     |      |
| Spectral range                        | 1100 - 2500 nm   |     |      |
| Peak Quantum Efficiency               | > 30%  |     |      |
| Typical operability                   | > 99%  |     |      |
| Cooling Temperature<br>@ 20°C ambient | -80 °C   |     |      |
| Cooling method                        | TEC + forced air   |     |      |
| Typical Dark Current                  | 30 Mø/px/s   |     |      |
| Typical Gain setting (ø/ADU)          | High   | Med | Low  |
| Typical readout noise (ø)             | 2.3  | 7.4 | 90   |
| Typical full well capacity (kø)       | 45   | 75  | 300  |
| Typical full well capacity (kø)       | 28   | 110 | 1400 |
| Readout modes                         | CDS ITR, CDS IWR, IMRO IWR   |     |      |
| Frame Rate                            | 240  |     |      |
| ROI Frame Rate                        | Up to 4000   |     |      |
| Integration time range                | from 1 µs to full well capacity  |     |      |
| Digitization                          | 14 bits  |     |      |
| Image Format                          | 16 bits HDF5, FITS and TIFF  |     |      |
| Software                              | PhySpec™ control and analysis software, SDK (C++, Python)                                |     |      |
| Computer interface                    | USB 3.0 and CameraLink™  |     |      |
| External control                      | Trigger IN/OUT   |     |      |
| Ambient temperature range             | 10 °C to 35 °C   |     |      |
| Power Supply                          | 12V DC   |     |      |
| Dimensions                            | 169 mm x 130 mm x 97.25 mm   |     |      |
| Weight                                | 2.9 kg   |     |      |
| Certification                         | CE  |     |      |

### MAIN ADVANTAGES OF TEC + AIR SYSTEM

- » Compact
- » No maintenance
- » Highly reliable
- » Low dark current
- » Long lifetime
- » Low readout noise

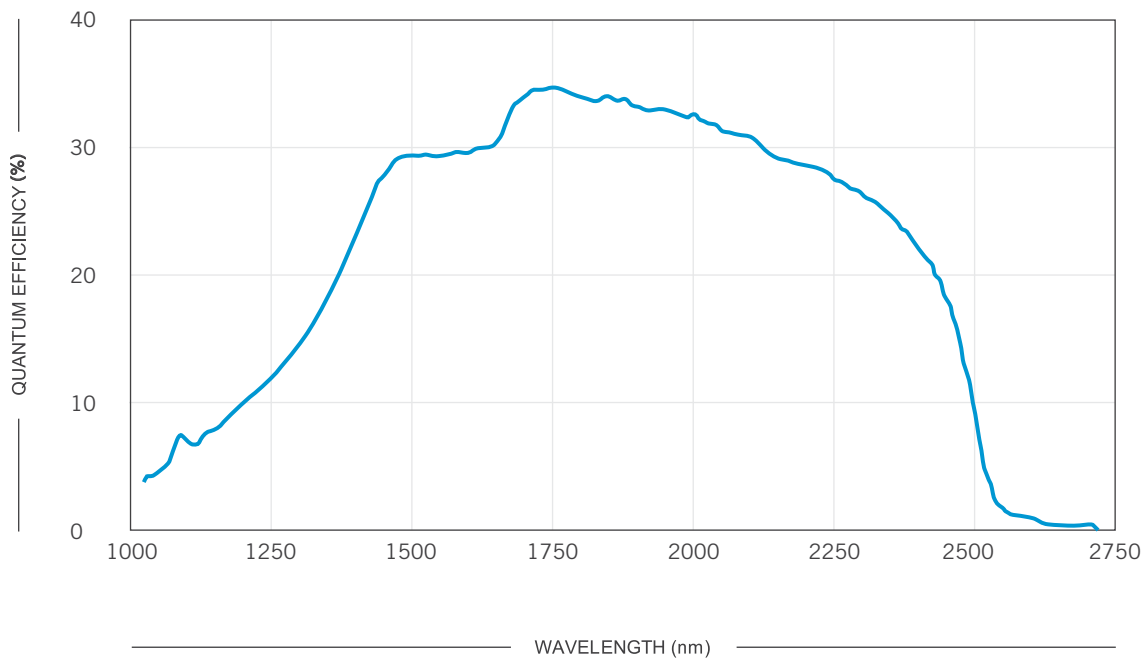

### ○ ZephIR 2.5e


Quantum efficiency presented at -80 °C

## APPLICATIONS



### SWIR Imaging in Degraded Environment

The images highlight the advantages of SWIR imaging using our ZephIR 2.5e camera. In the visible spectrum (left), dense smoke obscures the view, making it difficult to see through. However, the SWIR image (right) reveals details hidden in the smoke in the visible spectrum. This capability is crucial for applications such as surveillance, search and rescue, and industrial monitoring, where visibility is often hindered by environmental factors like smoke or fog. The ZephIR 2.5e provides enhanced visibility in challenging conditions, offering critical insights in degraded environments.

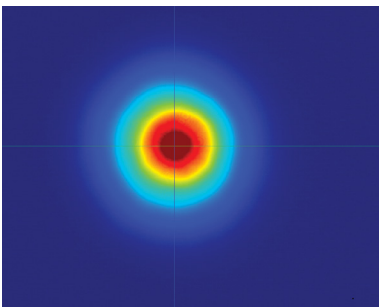

### 2-D Intensity Profiling with ZephIR 2.5e

The ZephIR 2.5e SWIR T2SL camera delivers precise 2-D intensity profiling of collimated supercontinuum sources. Detailed spatial energy distributions are captured, with horizontal and vertical axis profiles providing critical insights into beam uniformity and alignment. Accurate beam profiling, whether for lasers or supercontinuum sources, is essential for maintaining optimal system performance.

